

(, BMG10N)



 SINKI ELECTRONICS CO., LTD.

()

: 431-824

3 1038-13

: (031) 384-2784

: (031) 384-8897

: www.ske21.com

Rev. 2.0

1.	1
2.	1
3.	2
4.	3
4.1	4
4.2	6
4.3	7
5.	9
5.1	9
5.2	10
6.	11
6.1	11
6.2	11
7.	13

1.


, (PCM)
가 .

(2,175Hz) Guard-Tone

가 가

2.

1 .

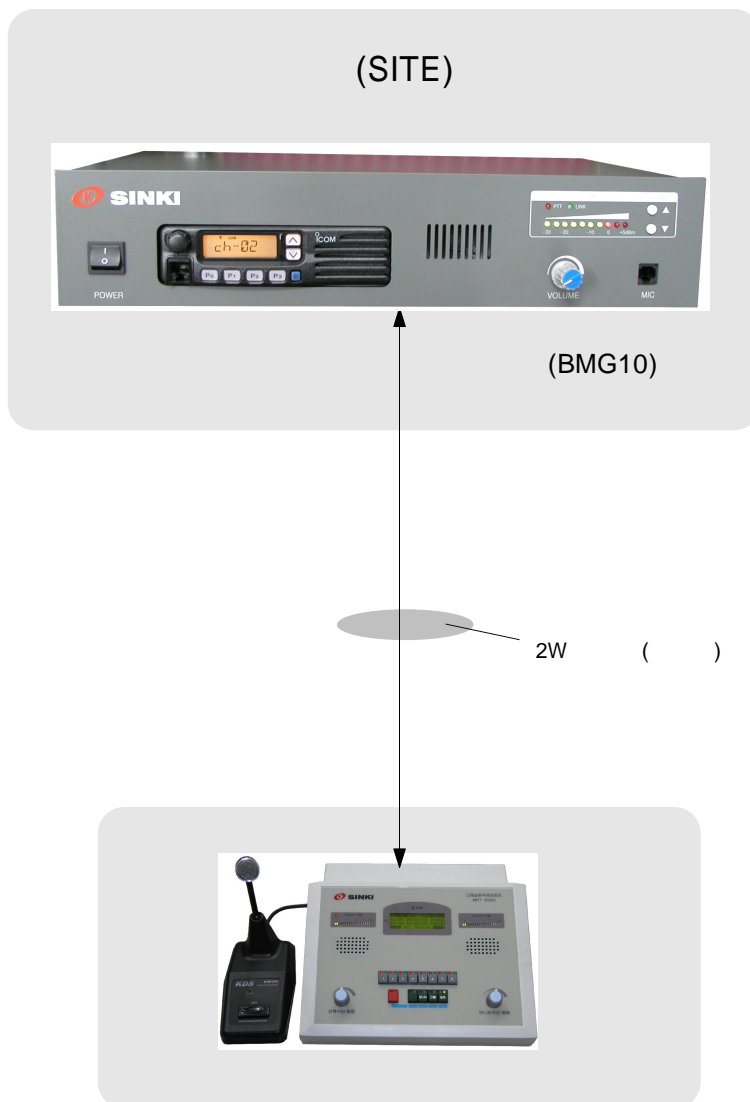


3.

- 1) 4 가 .
- 2) 1KHz .
- 3) 1KHz .
- 4) .
- 5) .
- (, 가 .)
- 6) 가 .
- 7) 가 .
- 8) (가,)가 2 .
- 9) .
- 10) ,
- 가 .
- 11) 가 (Guard-Tone)
- 12) (TOT) 가 . (TOT = 180)
- 13) 2 (2Wire), 가 .
- 14) 2 , 4 , E/M .


4.

4.1

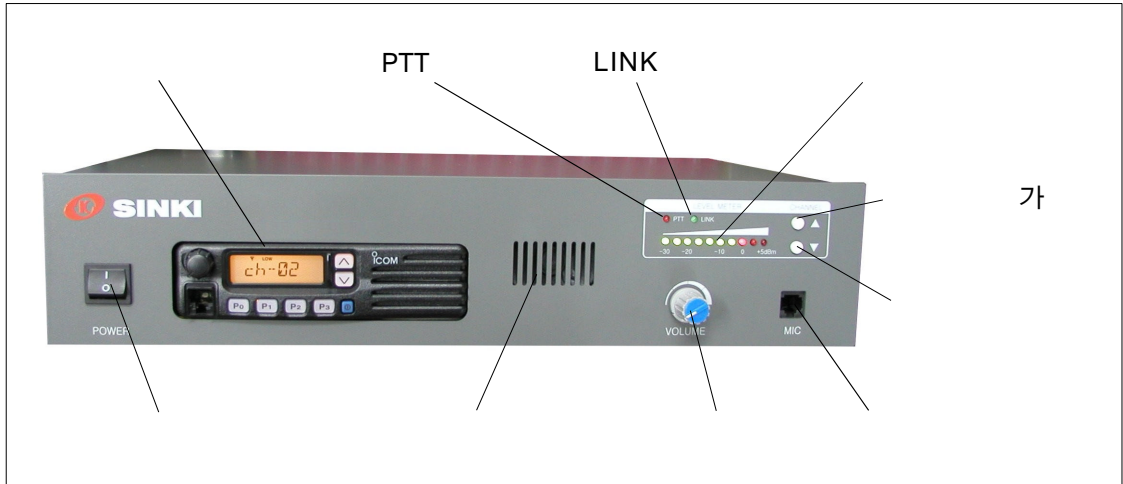

2 (BMG10) ()

: , .
 : , .()
 : , ,
 : , ,



	(ICOM社)
	(+10Vdc)
	AUDIO(TxA/RxA) OUTPUT (Normal 2Vpp)
	PTT (LOW ACTIVE)
	GND
	MIC INPUT

: , 1
 , LINK 가 , 5
 가 , LINK .
 가 ,

가 : 가 , 1 , LINK 가 , 5


가 , LINK . ,

PTT : PTT PTT 가 ,

LINK : ,

: ON/OFF .

4.2

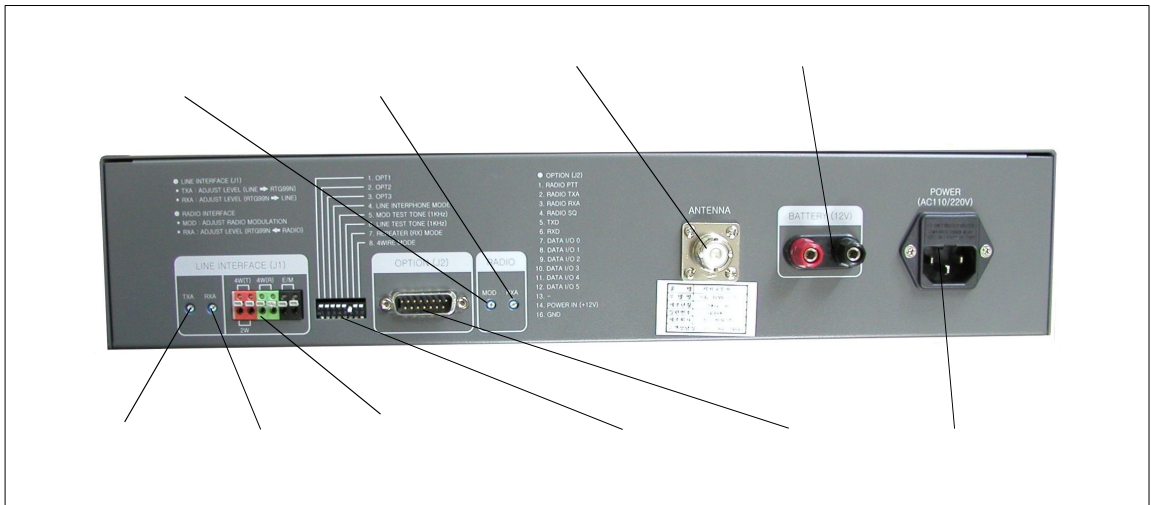

3 (BMG10) ()

:


가 . 가 0dBm(600

@1KHz) ,


:

0dBm(600

@1KHz) . 가




4W(R)	2
2W	4
4W(T)	4
E/M	E/M



ON

(ON)	(ON)															
1	Busy() ACTIVE LOW, Busy ACTIVE HIGH															
2,3	가 (Guard-Tone) <table border="1"> <tr> <td>2</td> <td>3</td> <td>가</td> </tr> <tr> <td>OFF</td> <td>OFF</td> <td>2,175 Hz</td> </tr> <tr> <td>OFF</td> <td>ON</td> <td>2,970 Hz</td> </tr> <tr> <td>ON</td> <td>OFF</td> <td>2,880 Hz</td> </tr> <tr> <td>ON</td> <td>ON</td> <td>2,100 Hz</td> </tr> </table>	2	3	가	OFF	OFF	2,175 Hz	OFF	ON	2,970 Hz	ON	OFF	2,880 Hz	ON	ON	2,100 Hz
2	3	가														
OFF	OFF	2,175 Hz														
OFF	ON	2,970 Hz														
ON	OFF	2,880 Hz														
ON	ON	2,100 Hz														
4																
5	1KHz															
4,5	, (4.3 JP3)															
6	1KHz, 0dBm(600)															
7	, 가 E/M 가 PTT LOW HIGH															
8	4 가															

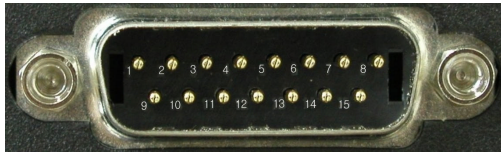

1	PTT	ACTIVE LOW (OPEN COLLECTOR TYPE)	
2	TX AUDIO OUTPUT	NORMAL 2Vpp (J2 MOD 가)	
3	RX AUDIO INPUT	0 ~ 20dB (J2 RXA 가)	
4	/SQ INPUT	ACTIVE LOW (GROUND .)	
5	TXD	(ICOM)	
6	RXD		
7	DATA 0	(0 5V)	가
8	DATA 1		
9	DATA 2		
10	DATA 3		
11	DATA 4		
12	DATA 5		
13			
14		12Vdc ~ 18Vdc	
15	GND	GROUND	

:

,

가 .


:

:

: 12V


: AC

4.3

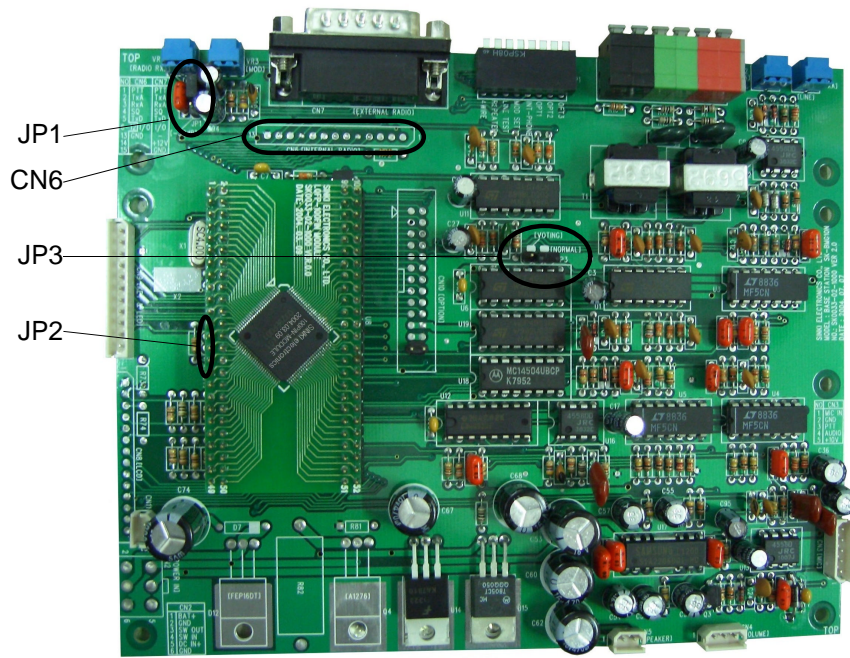

- JP1 : 0dBm -30dBm 가 .
- 0 dBm : 0~2Vpp .
- 30dBm : 0~90mVpp .
- JP2 : WATCH-DOG (.)
- JP3 : . 4.2 .
- VOTING : 가 , 1,950Hz , 가 가 , 1,950Hz .
- NORMAL : 가 .

CN6 :



1	PTT	ACTIVE LOW (OPEN COLLECTOR TYPE)	
2	TX AUDIO OUTPUT	NORMAL 2Vpp (J2 MOD 가)	
3	RX AUDIO INPUT	0 ~ 20dB (J2 RXA 가)	
4	/SQ INPUT	ACTIVE LOW (GROUND .)	
5	TXD	(ICOM)	
6	DATA 0	(0 5V)	가
7	DATA 1		
8	DATA 2		
9	DATA 3		
10	DATA 4		
11	DATA 5		
12	DATA 6	: 1. 2. 3.	
13	GND	GROUND	

5.

5.1


12~18Vdc가 , 4.2-

RADIO INTERFACE(J2)

ICOM社

ICOM社 : IC-F310, IC-F410, IC-F110, IC-F210

RADIO INTERFACE (CN6)

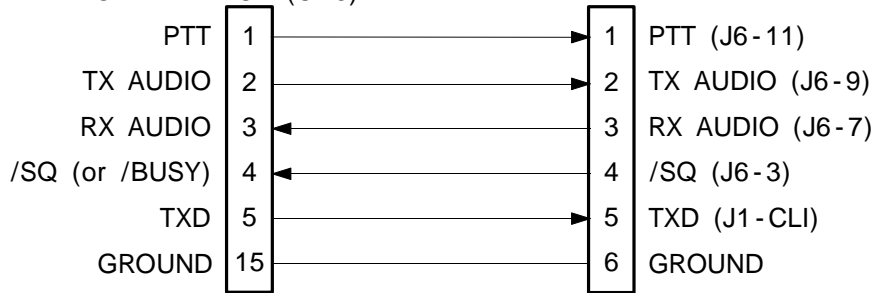

[D]


: PMR-Common-Expert


RX EXO = ON,

EPTT/FTSW = EPTT 가

가

. ()

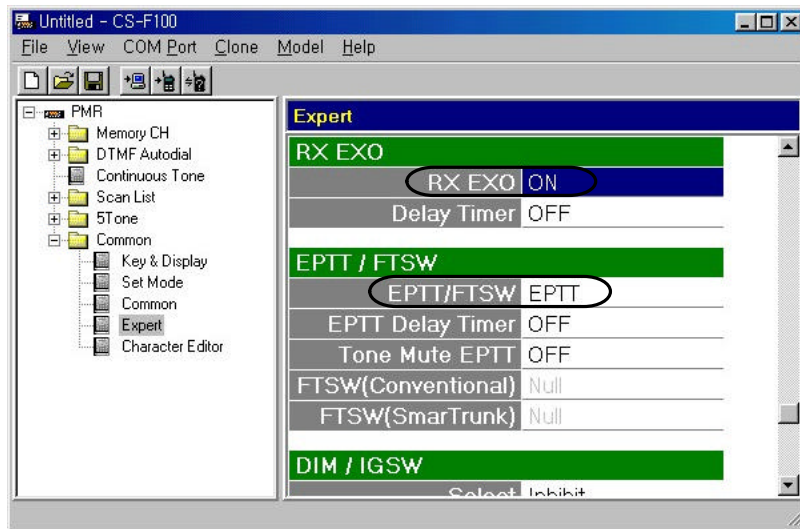


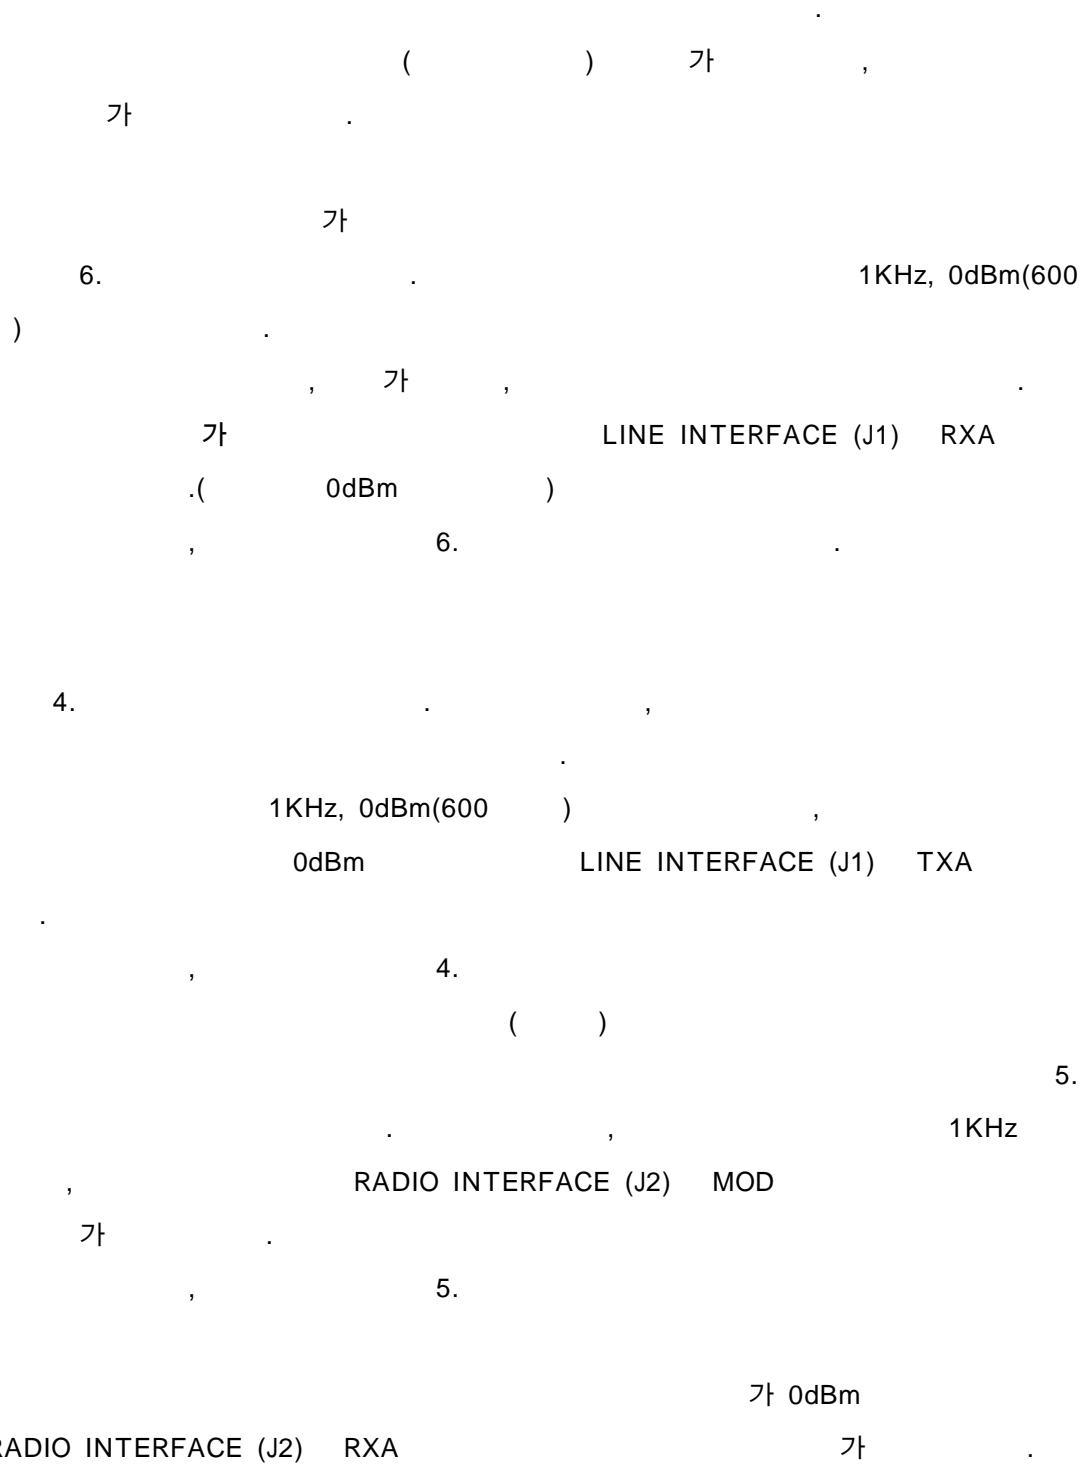



6.

6.1

5

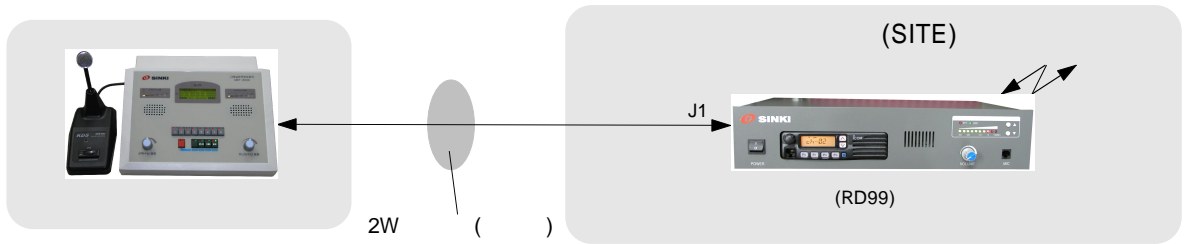

6.2

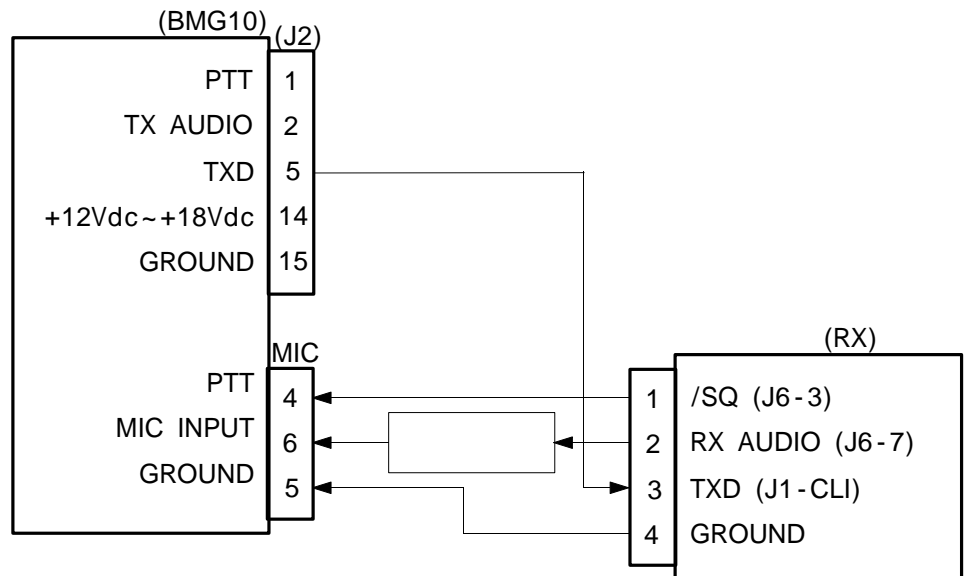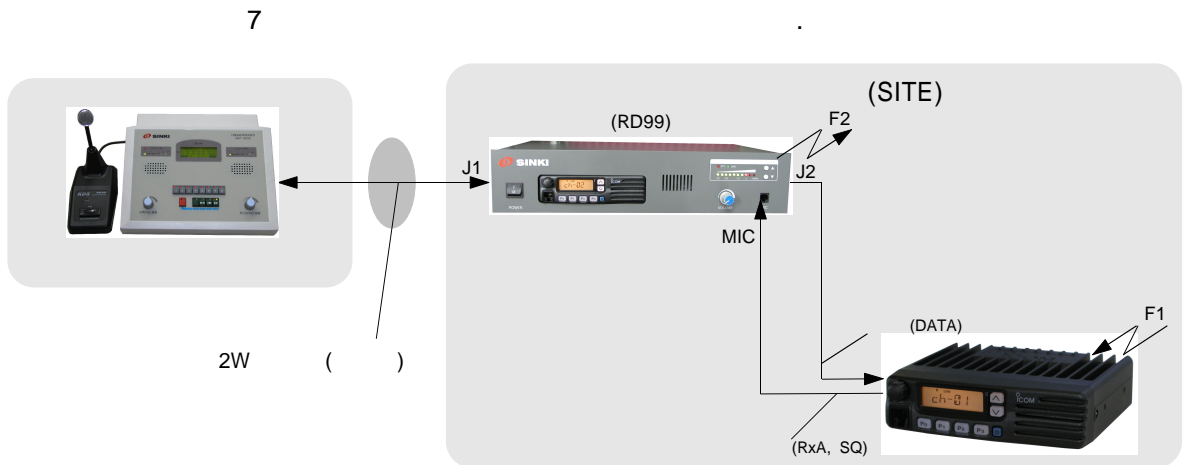

(RX)

MIC

, MIC

(TX)

(TX)

가

,

(TX)

7.

1	CPU	32
2		ROM : 128KByte RAM : 6KByte
3	A/D	8 , 10 Bit
4	D/A	2 , 8 Bit
5		2
6		2Wire Tone / 4Wire / E/M
7		600 ± 20% (@1KHz)
8		0 ± 6 dBm (@600 , 1KHz)
9		-25 ± 3 dBm(@600 ,1KHz)
10		-50dB
11		MSK (300 1200bps)
12		01 ~99
13	가 (Guard Tone)	2100Hz, 2175Hz, 2880Hz, 2970Hz
14		1KHz
		1KHz
15	TOT	180
16		7 ()
17		DC12~18Vdc
18		430(W) x 300(D) x 88(H) (M/M)
19		0 ~ 50 , 20% ~ 90%